


Features

- **3:1 minimum Shrink Ratio**
- **Continuous Operating Temperature:**
-55°C to +125°C
- **Flame Retardant**
UL VW-1, -F-mark.
- **Resistant to Common Fluids and Solvents**
- **Compliant with UL 224 VW-1;**
- **Minimum Shrink Temperature 70°C**

ORDER REF. NO. 3125 Y/G	EXPANDED	RECOVERED		STANDARD REEL LENGTHS
	INTERNAL DIAMETER D (MIN)	INTERNAL DIAMETER d (MAX)	WALL THICKNESS W (NOM)	
	mm	mm	mm	
3.2	3.2	1.00	0.50	200
4.8	4.8	1.50	0.55	100
6.4	6.4	2.00	0.55	100
9.5	9.5	3.00	0.60	50
12.7	12.7	4.00	0.65	50
19.1	19.1	6.00	0.85	50
25.4	25.4	8.00	1.00	50
39.0	39.0	13.00	1.20	50

Other sizes available subject to MOQ

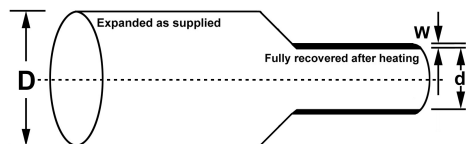

Property	Test Method	Performance (Typical)
Tensile Strength	ASTM D 2671	>14MPa
Elongation @ break	ASTM D 2671	400%
Longitudinal shrinkage	UL 224	±5%
Shrink temperature - full recovery	UL 224	120°C
Eccentricity	ASTM D 2671	<30%
Dielectric Strength	ASTM D-150	20kV/mm)
Volume Resistivity	ASTM D-876	10 ¹⁴ Ohm-cm
Flamability (VW-1)	UL 224	Pass
Copper Corrosion	UL 224	Pass
Elongation after Heat Ageing	(168hrs @ 158°C)	>350%
Heat Shock (4hrs @ 250°C)	ASTM D 2671	No cracking
Low Temperature Flexibility (4hrs @ -55°C)	ASTM D 2671	No cracking
Water Absorbion	ASTM D 570	0.15%

STANDARD COLOURS

Yellow/Green Stripe



All information contained in this leaflet is believed to be reliable. We advise however that customers should separately evaluate the suitability of the products for their particular application. Heatshrink Solutions Limited give no guarantees in respect of the accuracy or sufficiency of the information presented and disclaim any liability regarding its use. In no instance will we be liable for any eventual, indirect, or consequential damage or damages arising from the sale, resale, transfer, use or misuse of the product.