

Anti Tracking Termination Tubes

ATTT



Features

- Anti Tracking
- Halogen Free
- Continuous Operating Temperature: -40°C to +135°C
- For use in MV terminations up to 36kV
- Shrink temperature: 125°C


Properties	Test Method	Performance (Typical)
Specific gravity	ASTM-D792,A-I	1.2g/cm3 max.
Tensile strength	IEC 60684-2	14 MPa
Ultimate elongation	IEC 60684-2	500%
Longitudinal Change	ASTM-D 2671	6% ± 3% max
Secant Modulus	ASTM-D 882	30 Mpa max.
Low Temperature flex-ibility	ASTM-D 2671 Meth C	Does not break @ -40degC
Flamability	FMVSS 302	passed
Electrical Properties		
Dielectric strength	VDE 0303 Part 2	min 20 kV/mm
Volume Resistivity	VDE 0303 Part 2	10E ¹⁴ Ohm/cm
Comparative Tracking Index	IEC 112	CTI 600<0.1
Chemical Properties:		
Water absorption	VDE 0472	0.20%
Corrosive Action	ASTM-D 2671 A	non corrosive
Copper compatibility	ASTM-D 2671 B	non corrosive

STANDARD COLOURS

Red - Brown




Special colours not available.

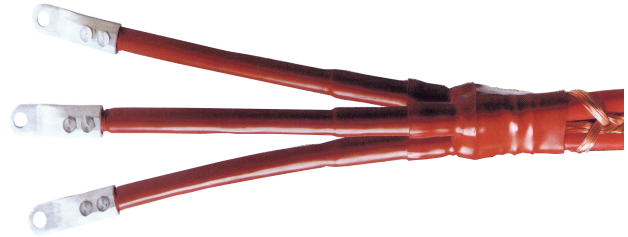

ORDER REF. NO.	EXPANDED	RECOVERED		STANDARD LENGTHS
	INTERNAL DIAMETER D (MIN)	INTERNAL DIAMETER d (MAX)	WALL THICKNESS W (NOM)	
NTTT	mm	mm	mm	m
19/6	19.0	6.0	2.00	50
25/10	25.0	10.0	4.10	50
32/12	32.0	12.0	2.8	50
38/12	38.0	12.0	2.80	25
45/16	45.0	16.0	4.10	25
58/19	58.0	19.0	3.50	25
68/25	68.0	25.0	3.50	25
76/32	76.0	32.0	3.50	15
90/32	90.0	32.0	3.50	15
100/40	100.0	40.0	4.10	10

Other sizes & wall thickness may be available on request

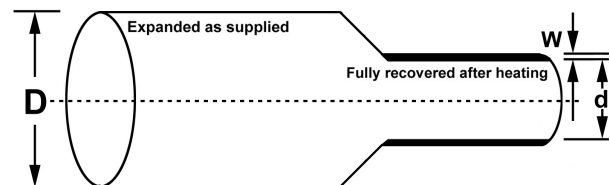

All information contained in this leaflet is believed to be reliable. We advise however that customers should separately evaluate the suitability of the products for their particular application. Heatshrink Solutions Limited give no guarantees in respect of the accuracy or sufficiency of the information presented and disclaim any liability regarding its use. In no instance will we be liable for any eventual, indirect, or consequential damage or damages arising from the sale, resale, transfer, use or misuse of the product.