



Low Voltage Breakouts




Two finger Breakout

MODEL	H		F		L		M		C	W	T
LV	S	E	S	E	S	S	S	E	E	S	S
IXL250	10	33	3	14	90	75	20	15	30	2	2.3
IXL 260	22	60	6.7	24	120	100	35	25	50	3.2	3




Three finger Breakout

MODEL	H		F		L	M	C	D	W	T
LV	S	E	S	E	S	S	E	E	S	S
IXL 300	8.5	28	2.5	12	70	23	20	15	2.70	1.80
IXL 350	14	45	4	15	110	20	45	20	2.30	1.50
IXL 360	22	60	8	26	185	45	65	40	3.75	3.00
IXL 370	33	80	16	36	210	50	70	40	4.00	3.25
IXL 375	33	110	16	40	210	50	70	40	4.00	3.25
IXL 380	47	110	20	48	225	75	90	55	3.80	3.00
IXL 385	47	125	20	55	250	75	90	55	4.25	3.50
IXL 390	54	140	27	62	240	65	90	45	4.00	2.50
IXL 395	54	155	27	62	240	65	90	45	4.00	2.50



Four finger Breakout

MODEL	H		F		L		M		C	D	W	T
LV	S	E	S	E	S	E	S	E	E	E	S	S
IXL 400	8.5	28	1.8	10	70	60	23	15	20	15	2.6	1.8
IXL 410	14	38	3.2	15	105	90	25	20	40	20	2.5	1.5
IXL 415	14	50	3.2	15	105	90	25	20	40	20	2.5	1.5
IXL 420	25	55	6.0	20	180	165	45	40	60	25	4.0	3.0
IXL 425	25	65	6.0	25	180	160	45	35	60	25	4.0	3.0
IXL 430	22	72	8.5	25	190	165	45	40	65	25	4.0	3.0
IXL 440	33	100	14	35	215	180	50	40	75	30	4.0	3.0
IXL 450	47	125	20	45	245	200	72	50	100	30	4.5	3.0

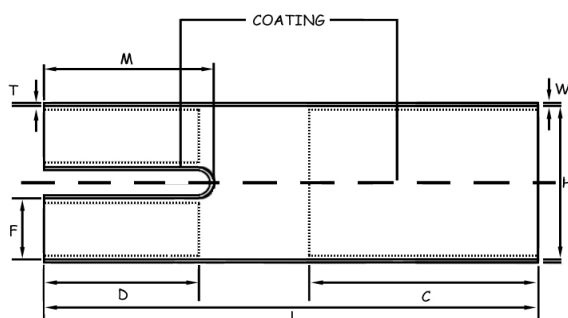

E- DIMENSION WHEN EXPANDED
S- DIMENSION WHEN FULLY RECOVERED

- All dimensions are in mm
- Tolerances:

THICKNESS	W&T	+/-10%
LENGTHS	L,M,N&C	+/-10%
DIAMETERS	H,EXP-H,E,EXP-E&O	+/-5%

All information contained in this leaflet is believed to be reliable. We advise however that customers should separately evaluate the suitability of the products for their particular application. Heatshrink Solutions Limited give no guarantees in respect of the accuracy or sufficiency of the information presented and disclaim any liability regarding its use. In no instance will we be liable for any eventual, indirect, or consequential damage or damages arising from the sale, resale, transfer, use or misuse of the product.